



pg. 2 of 4  
**MAINTENANCE OF TRAFFIC PLAN**

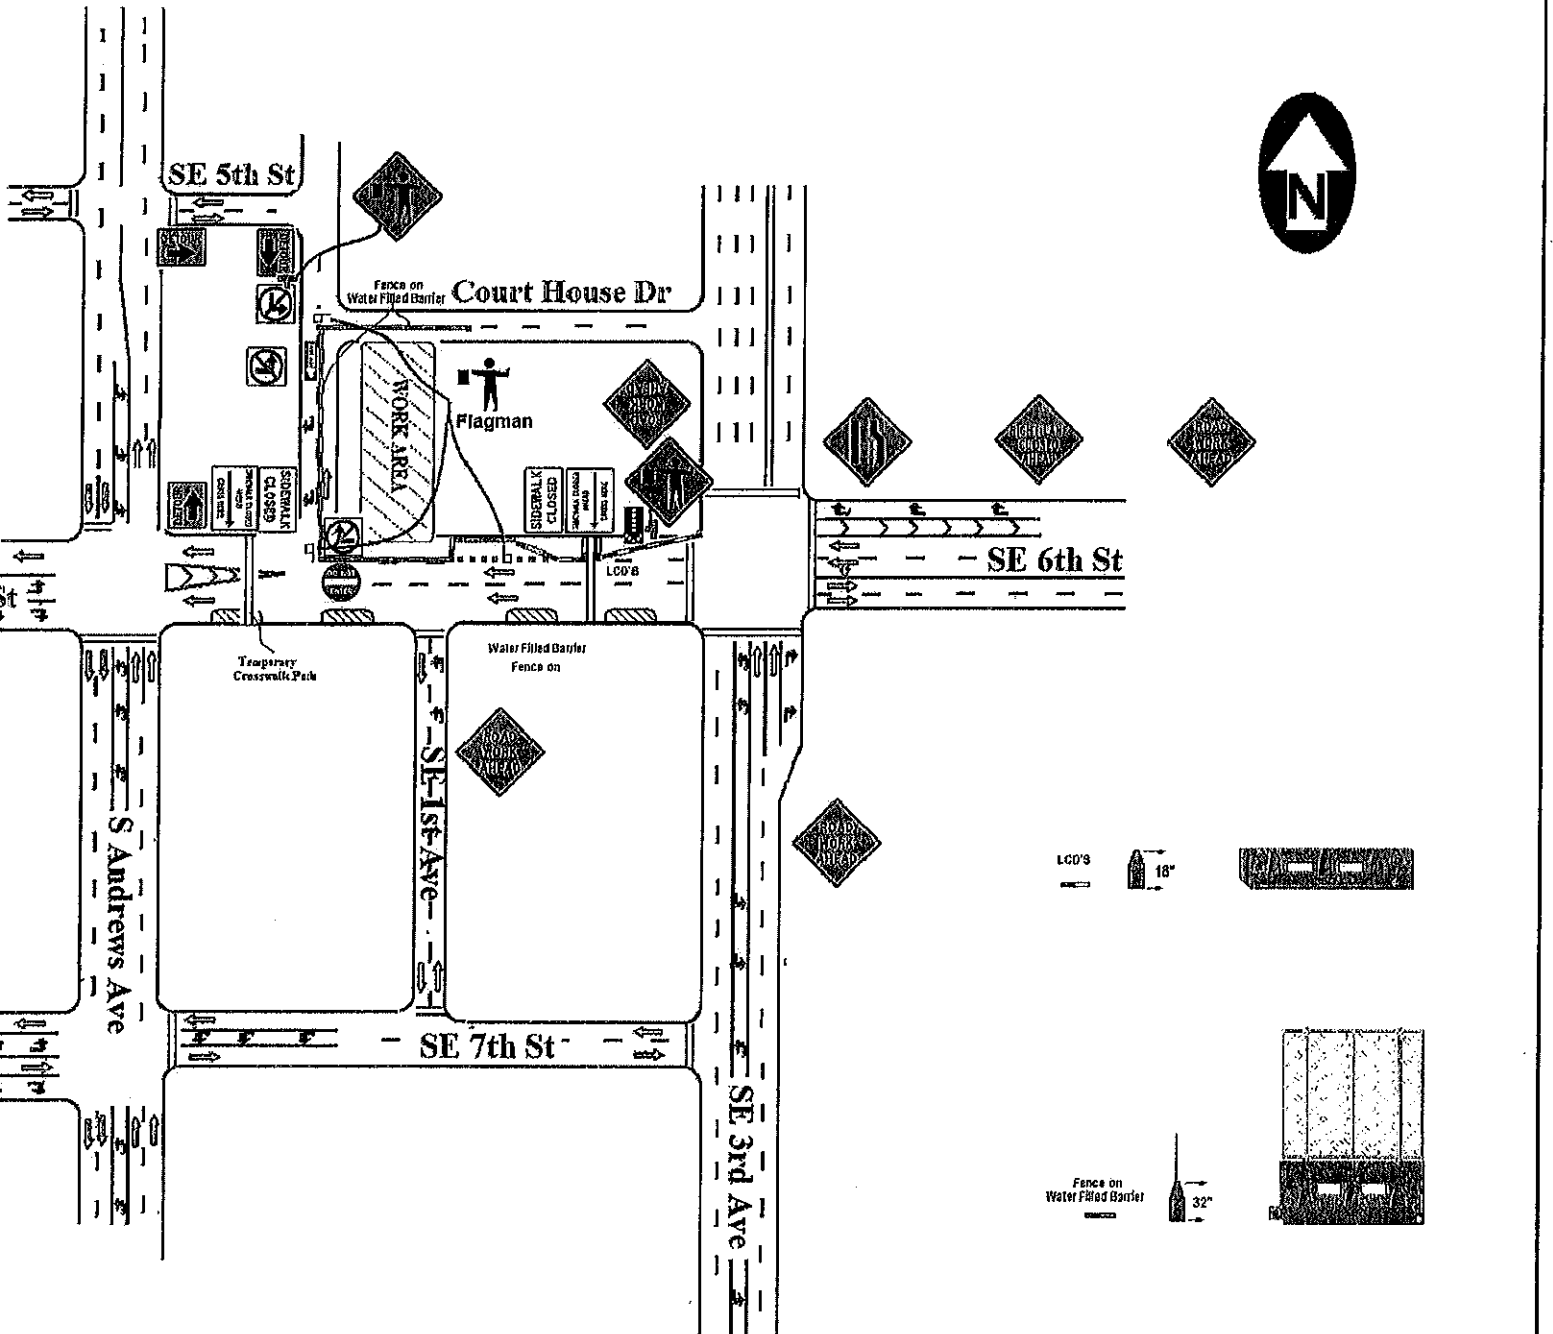


Table 6H-4. Formulas for Determining Taper Lengths

Speed Limit (S)	Taper Length (L) Meters	Speed Limit (S)	Taper Length (L) Feet
60 mph or less	$L = \frac{VS^2}{156}$	30 mph or less	$L = \frac{VS^2}{63}$
70 mph or more	$L = \frac{VS^2}{52}$	45 mph or more	$L = \frac{VS^2}{28}$

Where: L = taper length in meters (feet)  
 V = width of offset in meters (feet)  
 S = posted speed limit, or a posted 85 mph speed limit for a speed limit between 60 and 85 mph, or a posted speed limit of 70 mph (90 mph)


Notes for Figure 6H-20 - Typical Application 19  
 Detour for Closed Street

1. The detour should be planned to avoid any major intersections.
2. The detour should be planned to avoid any major intersections.
3. The detour should be planned to avoid any major intersections.
4. The detour should be planned to avoid any major intersections.
5. The detour should be planned to avoid any major intersections.
6. The detour should be planned to avoid any major intersections.
7. When used, the Street Name sign shall be placed along the Detour sign.




EX. 2

pg. 3 of 4  
**CONSTRUCTION FENCE PLAN**

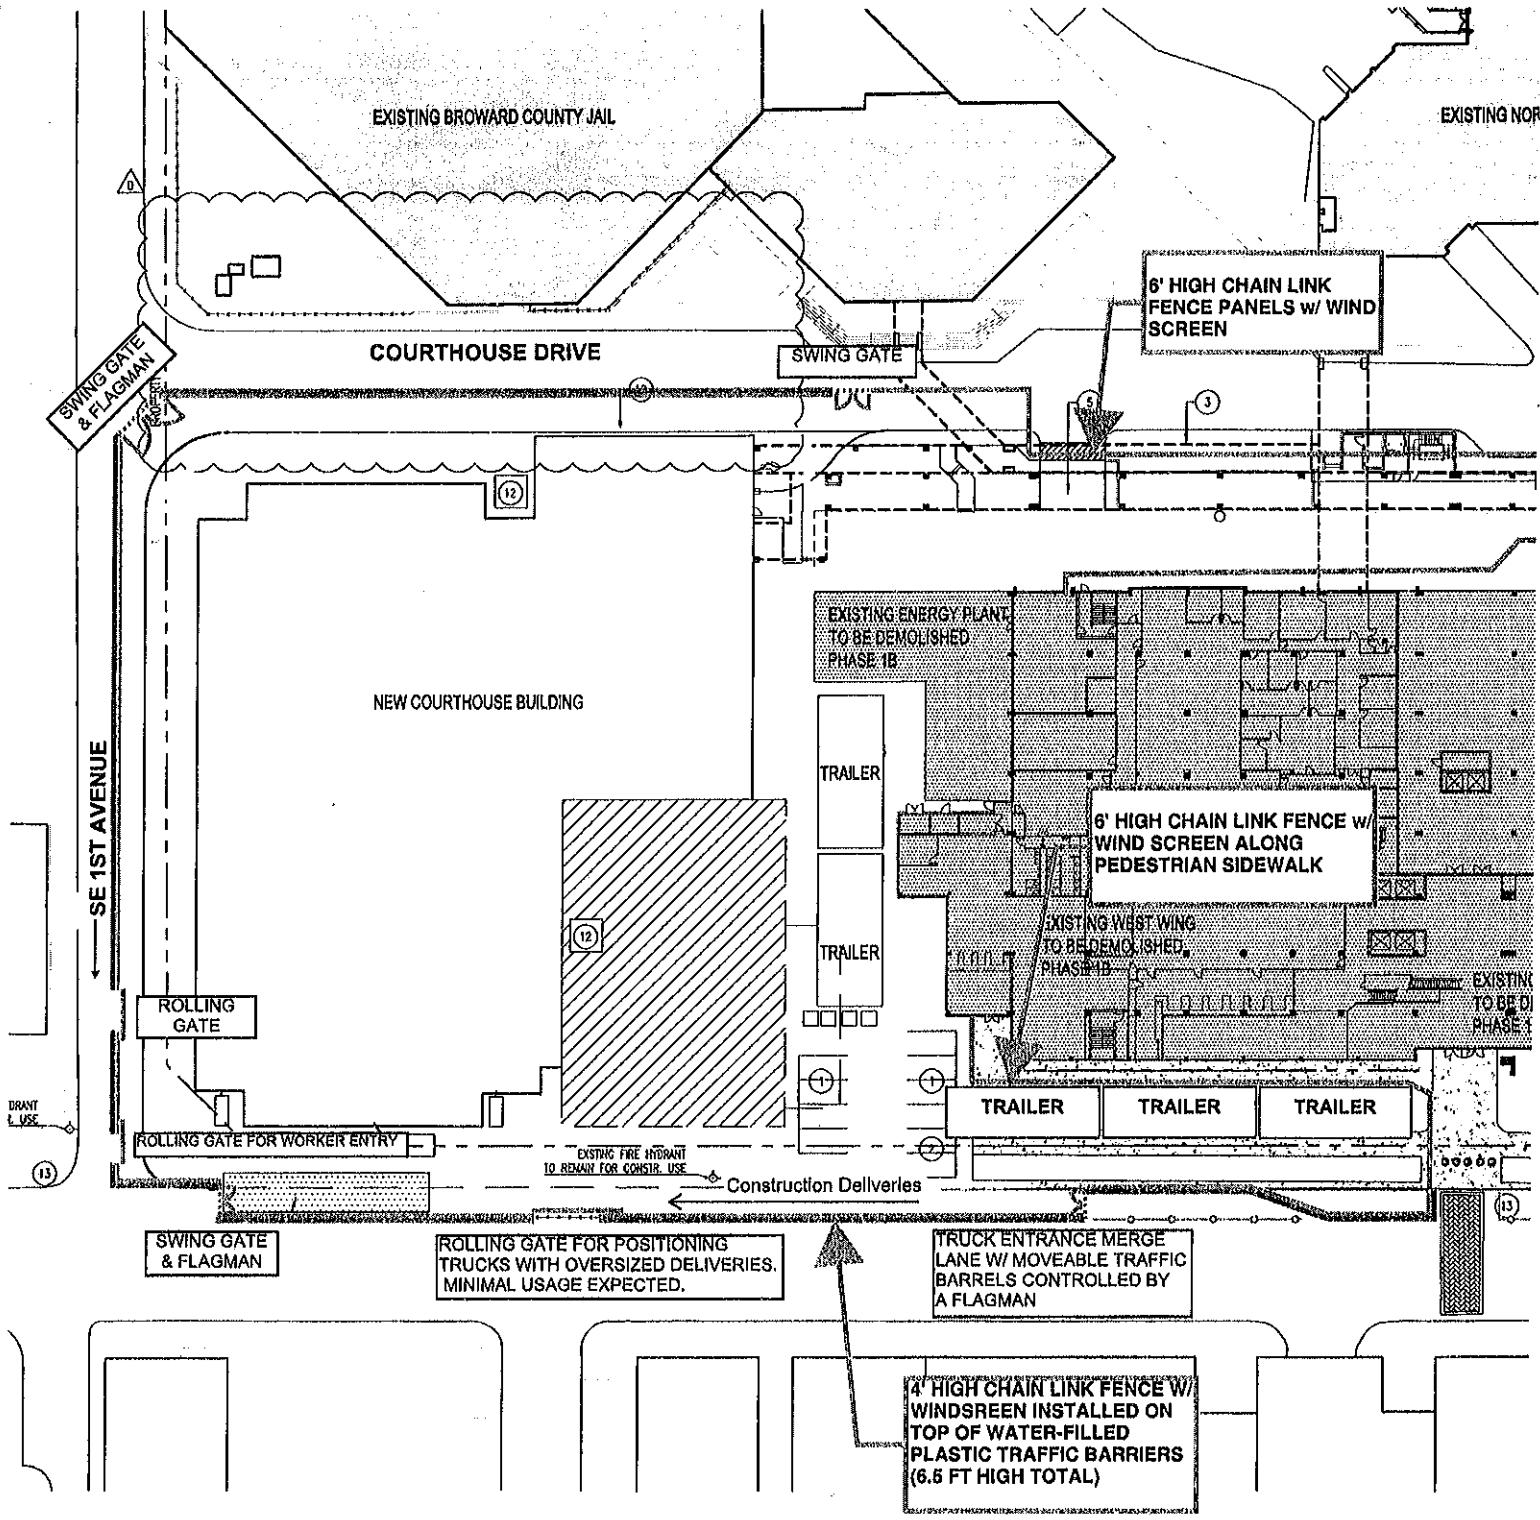

01 | CONSTRUCTION FENCE PLAN

A1.1.03 REF. BC-ASPD1-STAGING BC-LANDSCAPE SCALE:



EX. 2  
 12-2241

